

TR-ACS-K1108A

Card Reader



Key Features

- Supports RS-485 and Wiegand (W26, W34) protocol
- Supports reading EM card
- Supports authentication via card, password and QR code
- Supports bluetooth module (when connecting by RS-485)

Specifications

Interface

TAMPER	1
RS-485	1 RS-485. Supports OSDP protocol, Baud 9600, 19200, 38400
Wiegand	1
Card type	EM card


General

Power supply	12 VDC
Power consumption	With load: ≤ 14 w Without load: ≤ 4 w
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 to 90% (no condensing)
Dimensions	125 mm × 84.5 mm × 18 mm (4.92" × 3.33" × 0.71")
Installation	Wall mounting
Weight	≤ 1 kg (2.20 lb)
Buzzer	Support

Function

Barcode recognition	Support Format: Code 128, Interleaved 2 of 5, Matrix 2 of 5, Code 39, Codebar, Code 9 and UCC/EAN-128
QR code recognition	Support (when connecting by RS-485)

Dimension

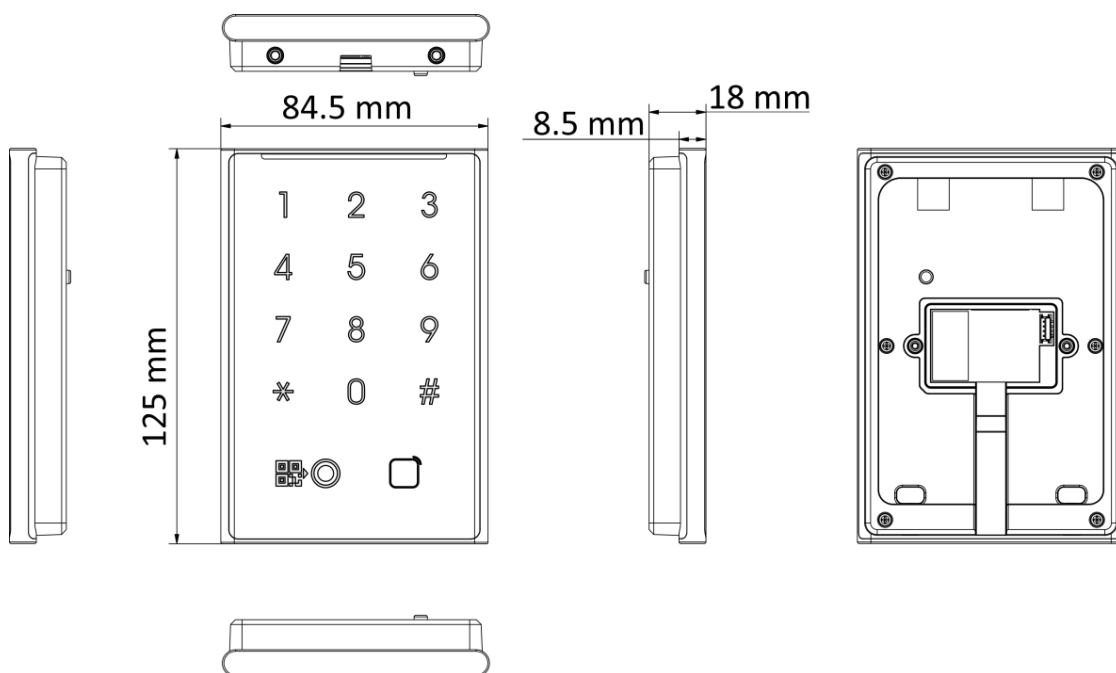

Accessory

Note: Specifications are subject to change without notice.